Lifespan: **50 000 h** | **IP 67** | **CRI 70** | Warranty: **5 years** | Storage temp.: **-20~70°C** | Operating temp.: **-40~45°C**

Floodlight

Nord 30



Model	Product code	Power	Luminous flux	lm/W	Suggested HID replacement
Nord 30	01-006-001-03-30-B	30 W	3663 lm	133	80W HID


LED type	Voltage	Beam angle	Colour temp.	Dimensions	Material	Weight
3030 SMD Lumileds	100-277 V AC	60°	5200 K	172.3 x 219.4 x 49.3 mm	ALU, GL, PC	1.6 kg

ISOLUX Diagram


Test Distance: 10.642m [K=1.0000]

Mounting Height: 33' (10.0m)

3%	1.089lx	0.1012fc
5%	1.816lx	0.1687fc
10%	3.632lx	0.3374fc
30%	10.89lx	1.012fc
50%	18.16lx	1.687fc

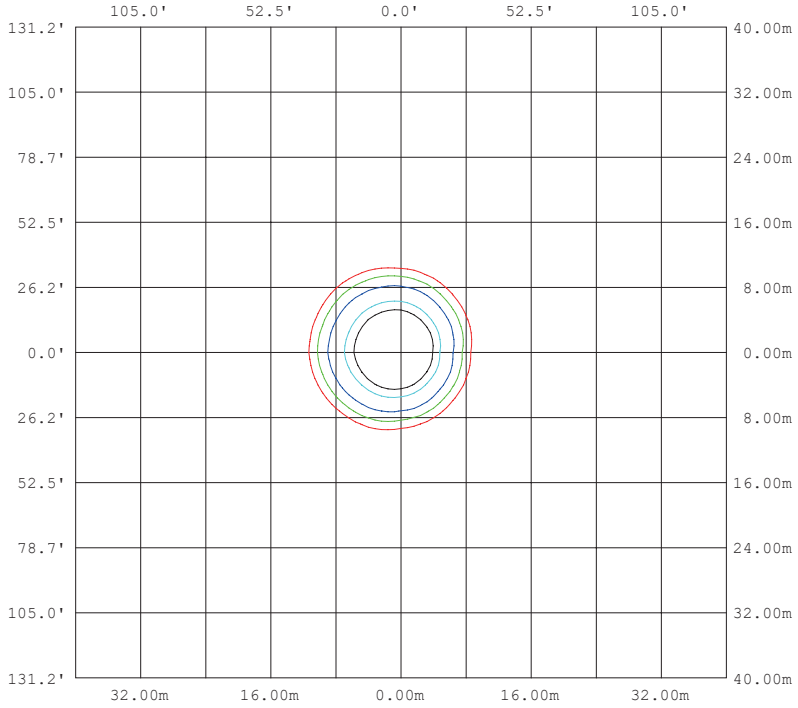

Light Distribution Curve

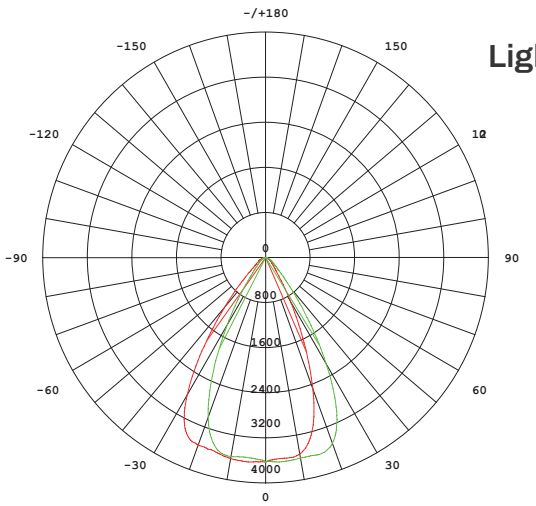

UNIT : cd

V 0.0DEG PLAN , 59.2

H 0.0DEG PLAN , 59.2

AVERAGE BEAM ANGLE (50%) : 59.2 DEG