BERGMEN®

VERIS


LED Lamp bluetooth speaker with FM



User Manual

Thank you for choosing us. Please read this user manual before using the speaker.

Packing list



LED Lamp Veris



user manual




USB data cable

Specifications:

- Name: BERGMEN Veris
- Model No. : 01-012-003-01
- Charging Input: 5V DC – 1000mAh
- Battery Capacity: 3.7V / 2000 mAh
- Charging Time: 3-3.5 h
- Speaker Specifications: Φ52 x 32 mm
- Speaker power:4Ω4W
- Lamp power: 1.2 W
- Frequency Range: 70Hz-20KHz
- Distortion: ≤0.5%
- Whole Signal to Noise Ratio: ≥65dB
- Main Material: ABS/PP, Stainless steel
- Size: Φ86×121mm
- Weight:About 350G
- Music Playing time: 5 hours (playing Bluetooth music only)
- Lighting time: 5 hours on high brightness. 120 hours on low brightness
  (Note: battery life will be less when speaker and light are both turned on at the same time).

Button Functions:

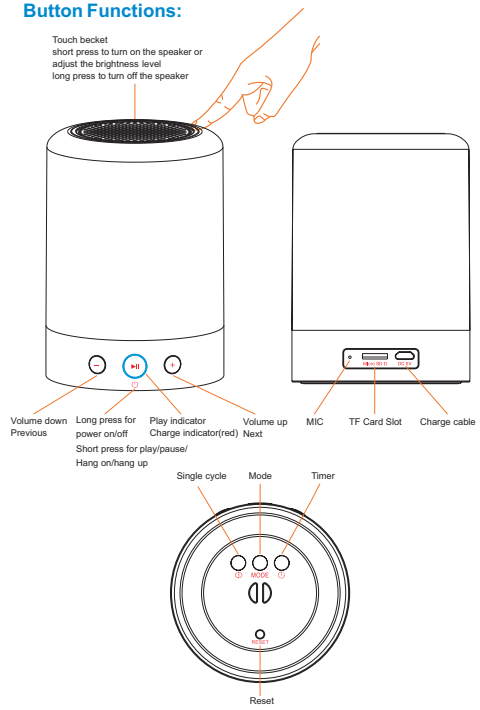

Button Icon

⏻	Charge cable (long press for 3 seconds)	MODE	Mode switch
▶II	Play/pause Hang on/hang up (short press)	↻	Single cycle
+	Volume up/Next Timer time adding	◷	Timer
-	Volume down/previous Timer time increasing	RESET	Reset

Power

Long press for three seconds to turn on the speaker, three seconds pressing again to turn off the speaker. The blue indicator will flash when the speaker is on, and the speaker will enter Bluetooth mode automatically at the same time.

Charging

Please make sure the speaker is fully charged in first use. There will be a voice prompt saying “10% Low battery remain, please recharge” Charge the speaker with the provided USB cable which is compatible with any computer or cell phone charger.(The cell phone charger or other 5 V output USB adaptor is suggested to charge the speaker.)The charge indicator will flash when charging, and the light will be off when full charged.

Remaining battery capacity query

Long press “ ↻ ”can check the remaining capacity, the voice prompt will tell you the current capacity. There are five capacity voice prompts: “10% Low battery remain, please recharge”, “About 30% battery remain”, “About 50% battery remain”, “About 80% battery remain”, “100% battery remain”, separately showing the current battery capacity.

Reset function

When the lamp, music playing and other functions are out of working, please press the “RESET” button with needle, restart the speaker again, the speaker will return work as normal.

Speaker function:

Bluetooth Mode:

First turn on the speaker, the speaker will enter Bluetooth mode automatically. Or short press the “MODE” button switching to the Bluetooth mode when it is not the Bluetooth mode, and the Bluetooth indicator light will flash rapidly, companying with voice prompt “Waiting for pairing”, at this moment, the speaker is in waiting for pairing status, and in this status only the speaker will be connected successfully, the speaker will connect the Bluetooth device automatically if they are connected before.

Bluetooth connection:

Step 1: Open the Bluetooth setting on the phone or tablet and click “searching device”. Iphones will search for Bluetooth devices automatically.
Step 2: The Bluetooth paring name is found out when the phone or tablet screen displays the character “Lightspeaker L7”,click the character for connection.
Step 3: Enter “0000” or “1234” and click OK if there's a prompt that requires entering a password.
Step 4: The phone or tablet will indicate successful connection when connected. And the indicator light will flash rapidly to slowly

Bluetooth pairing and connection instruction:

1.The speaker will connect the Bluetooth device if they are connected before
2.The speaker will not connect other Bluetooth device when it is connecting with one cell phone or tablet.
3.The cell phone and tablet will not connect the speaker when they are connected with other Bluetooth device, in this case, the phone or tablet need turn off the Bluetooth and then connecting the speaker.

Music Playing

Open the player device when the bluetooth connection is successful. Click to play music, and the Bluetooth speaker will play the music.
Operating the buttons on the Bluetooth speaker to control the music playing:
Short press “ ▶II ” for music play/pause .
Short press “ + ” for next song play and long press for volume up.
Short press “ — ” for previous song play and long press for volume down.

Bluetooth Hands free Call

Answer and hang up the phone:
There will be a voice prompt from the speaker when there is a call incoming. Touch the top becket or Click the “ ▶II ” to answer the phone call, and touch the top becket again or click the “ ▶II ” again to hang up.

TF Card Mode

Insert the TF card or switch to TF card mode by short press “ MODE ” button when the speaker is on. There will be a voice prompt “TF card mode”. The speaker support music in MP3/WMA/APE format.
Operating the buttons on the Bluetooth speaker to control the music playing:
Short press “ ▶II ” for music play/pause .
Short press “ + ” for next song play and long press for volume up.
Short press “ — ” for previous song play and long press for volume down.
In TF mode, short press the “ ↻ ” will loop playback the current playing music, short press again to cancel the loop playback.

FM Mode

Short press the “ MODE ” button switching to FM radio mode when the speaker is on, there will be a voice prompt “FM Mode ”. Short press the “ ▶II ” button in FM mode to search the channels automatically, the indicator light will flash rapidly when searching channels, and the channels will save automatically after searching.
Operating the buttons on the Bluetooth speaker to control the FM radio:
Short press “ ▶II ” for channels searching, short press “ ▶II ” again stop searching.
Short press “ + ” for next channel and long press for volume up.
Short press “ — ” for previous channel and long press for

Lamp Function

Turn on the lamp by touching the top becket when the speaker is on. There are seven different light level: Micro brightness, Low brightness, Medium brightness, High brightness, Orange light, Colorful light, Colorful light fixing, Cycling by turn. Long press the top becket for three seconds to turn off the light. Soft touch the becket will answer or hang up the call when there is a phone call incoming.
(Note: The lamp will be out of working when the speaker is off, the lamp will start work when the speaker is on)

Timer Function

Click the timer button “ ◷ ”at the bottom when the lamp is on. And there will be a voice prompt “Timer mode”. There are six timer mode by turn : “10 mins timing”, “20 mins timing”, “30 mins timing”, “60 mins timing”, “90 mins timing”, “120 mins timing”, companying with related voice prompt. The speaker and light will turn off in set time automatically, the time is suitable for mask dressing, Yoga and sleeping music light. Long press the timer button “ ◷ ”to turn off the timer function.

Frequently Asked Questions

Questions	Solutions
Unsuccessful pairing and connection repeatedly	1.Check the speaker and make sure it is in the searching state or reboot the speaker. 2.Connection is difficult when there are too many Bluetooth devices nearby. Turn off other Bluetooth devices. 3.Turn off the Bluetooth device that was connected with the Bluetooth speaker last time, and reconnect the speaker.
Muted or distorted sound	1.Check the volume of your phone or the speaker, and adjust the volume. 2.The battery is low. Please charge it.
Choppy music play	1. Check if the device is beyond the effective connection distance. 2. Check if there is any obstacle between the speaker and your device.
The indicator not shining in Bluetooth mode	1.The battery is low. Please charge it. 2.Please reboot the speaker.

Precautions

1.Please store and use the product in room temperature environment.
2.Do not expose this product in rain or wet conditions.
3.Do not drop or bump this product.
4.Do not disassemble, repair, or modify the product.
5.Please use the power charge with rated voltage for the speaker.
6.It may cause hearing damage if playing music in high volume for a long time. Consider avoiding excessively high volume when playing music for a long time.
Disassemble this product will invalidate the warranty.

After finishing of an exploitation product should be utilized and delivered to the proper collection point of an electrical waste collection.

Art Neon Lighting sp. z o.o. spółka jawna
ul. Zawila 65E | 30-390 Kraków
www.artneon.pl
tel. 0048 12 415 50 50

CE