
Lighting Group


For **indoor** applications | **IP 40** | **CRI 80** | Warranty: **5 years**

LED panel

Eero Evo

Eero Evo are ultra-slim LED panels with a thickness of just 10 mm, which combine minimalist design with advanced lighting technology. Thanks to the use of a light guide plate (LGP) and the highest quality materials, these panels offer even, bright light, ideal for modern interiors. They are ideal for offices, meeting rooms, educational and medical facilities, guaranteeing optimum light comfort.

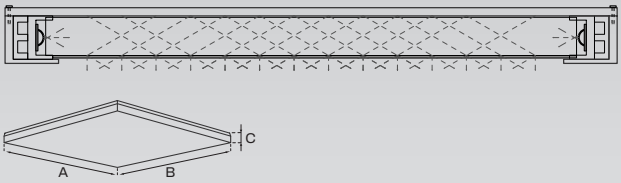

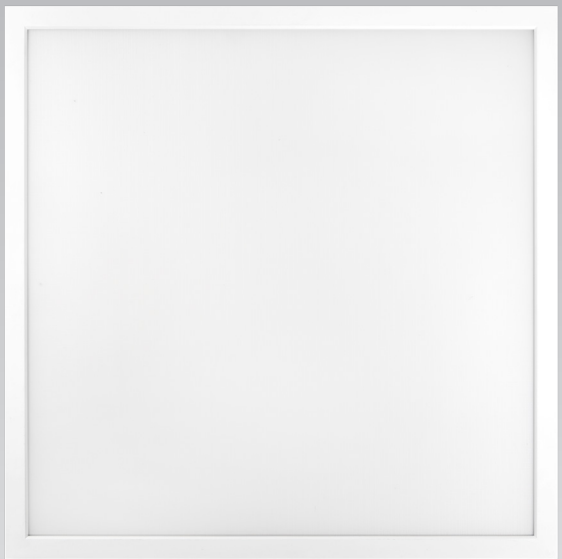

Double frame structure

Thanks to the Dual Structure of the frame, Eero Evo panels minimise the impact of thermal expansion of the diffuser. This prevents mechanical damage to the LEDs, extending the life of the panel.

Top quality materials

Eero Evo panels use a PMMA diffuser, a material with a light transmittance of up to 92%, which is resistant to UV and ageing. This ensures even light and a long-lasting aesthetic appearance.

Philips brand power supplies

The Eero Evo panels have Philips power supplies that guarantee stable operation, energy efficiency and minimise the risk of overheating and failure, ensuring safety and high performance.


Technical specifications

Model	Product code	LED type	Voltage	Power	Beam angle	Colour temp.	Luminous flux	Dimensions [AxBxC]	Weight
Eero Evo 24	01-005-077-02-04-01	4014 SMD Runlite	220-240 V AC	24 W	90°	4000 K	2880 lm	295 x 595 x 10 mm	1.3 kg
Eero Evo 24	01-005-078-02-03-01	4014 SMD Runlite	220-240 V AC	24 W	90°	3000 K	2880 lm	295 x 595 x 10 mm	1.3 kg
Eero Evo 29	01-005-073-03-04-01-A	4014 SMD Runlite	220-240 V AC	29 W	90°	4000 K	4200 lm	595 x 595 x 10 mm	2.1 kg
Eero Evo 29	01-005-074-03-04-01-A	4014 SMD Runlite	220-240 V AC	29 W	90°	4000 K	4200 lm	295 x 1195 x 10 mm	2.3 kg
Eero Evo 29	01-005-075-03-03-01-A	4014 SMD Runlite	220-240 V AC	29 W	90°	3000 K	4200 lm	295 x 1195 x 10 mm	2.3 kg
Eero Evo 30	01-005-073-03-04-01	4014 SMD Runlite	220-240 V AC	30 W	90°	4000 K	4200 lm	595 x 595 x 10 mm	2.1 kg
Eero Evo 30	01-005-074-03-04-01	4014 SMD Runlite	220-240 V AC	30 W	90°	4000 K	4200 lm	295 x 1195 x 10 mm	2.3 kg
Eero Evo 30	01-005-075-03-03-01	4014 SMD Runlite	220-240 V AC	30 W	90°	3000 K	4200 lm	295 x 1195 x 10 mm	2.3 kg
Eero Evo 50	01-005-076-05-04-01	4014 SMD Runlite	220-240 V AC	50 W	90°	4000 K	6750 lm	595 x 1195 x 10 mm	4.6 kg

Operating temp: **-30~40°C**

Storage temp.: **-30~65°C**

Accessories



Frame for surface mounting
595x 595 mm
Product code: 01-011-011-010



Frame for surface mounting
595x 1195 mm
Product code: 01-011-011-010



Frame for surface mounting
295x 595 mm
Product code: 01-011-011-010



Frame for surface mounting
295x 1195 mm
Product code: 01-011-011-010